

STRAIGHT ADAPTER DETAIL

NOTE: BRACES HAVE 4-INCH LONG TACK WELD INSIDE RECTANGULAR END FOR ADDITIONAL STRENGTH


PRODUCT SPECIFICATION - STRAIGHT ADAPTER


PRODUCT LIST

PRODUCT DIMENSIONS

ROUND EQUIV.	DIMENSIONS	MODEL	ROUND AREA (SQ. IN.)	A	B	C	D	E	F	G	NUMBER OF BRACES
4"	3"x5"x9"	CP-SPA05	12.730	3.269"	5.269"	4.5"	10 GA.	5"	2"	3"	
5"	3"x8"x11"	CP-SPA08	20.005	3.269"	8.269"	5.563"	10 GA.	8"	4"	3"	
6"	3"x12"x13"	CP-SPA12	28.890	3.269"	12.269"	6.625"	10 GA.	12"	6"	3"	
8"	4"x14"x15"	CP-SPA14	50.027	4.269"	14.269"	8.625"	10 GA.	14"	8"	4"	
8"	3"x17"x15"	CP-SPA17	50.027	3.269"	17.269"	8.625"	10 GA.	17"	8"	3"	1
10"	3"x27"x17"	CP-SPA27	78.854	3.269"	27.269"	10.75"	10 GA.	27"	10"	3"	2
10"	4"x22"x17"	CP-SPA22	78.854	4.269"	22.269"	10.75"	10 GA.	22"	10"	4"	1
12"	4"x28"x18"	CP-SPA28	111.931	4.269"	28.269"	12.75"	10 GA.	28"	11"	4"	2

MATERIAL: 10 GAUGE GALVANIZED A653 G90, MEETS ASTM A-653. TENSILE STRENGTH 50,000. YIELD 36,000. ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #95 COATING. RECTANGULAR CONNECTION: MASTIC (MUST MEET OR EXCEED ASTM D-4586), CAULKING, EPOXY OR OTHER CITY OF LOS ANGELES APPROVED METHOD. ROUND CONNECTION: CAST IRON/ PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS. CONTACT BUREAU OF CONTRACT ADMINISTRATION MATERIAL CONTROL SECTION AT (213) 485-5080 FOR FABRICATION INSPECTION

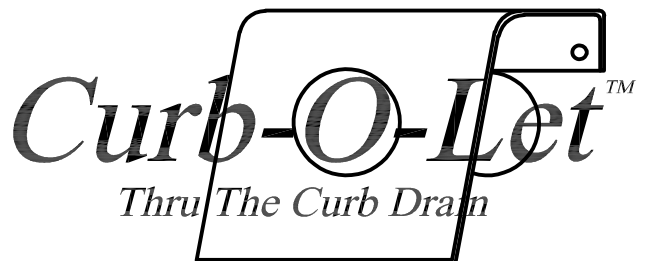

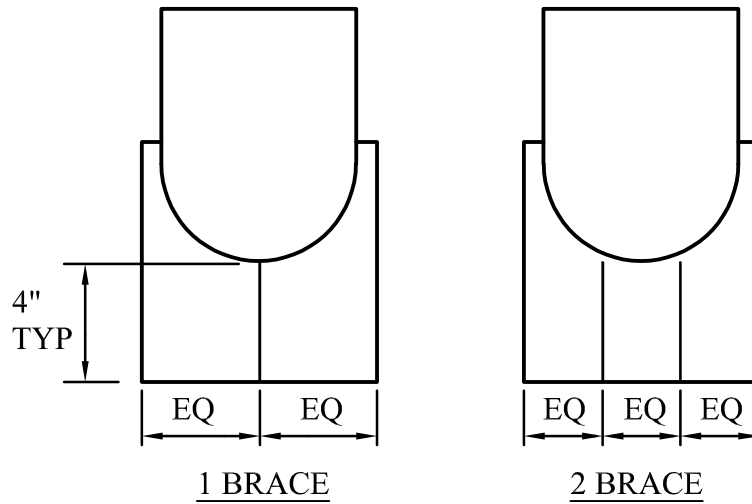

STRAIGHT ADAPTER BRACE DETAIL

NOTE: BRACES HAVE 4-INCH LONG TACK WELD INSIDE RECTANGULAR END FOR ADDITIONAL STRENGTH

PRODUCT SPECIFICATION - STRAIGHT ADAPTER

PRODUCT LIST

PRODUCT DIMENSIONS

ROUND EQUIV.	DIMENSIONS	MODEL	ROUND AREA (SQ. IN.)	A	B	C	D	E	F	G	NUMBER OF BRACES
8"	4"x14"x15"	CP-SPA14	50.027	4.269"	14.269"	8.625"	10 GA.	14"	8"	4"	
8"	3"x17"x15"	CP-SPA17	50.027	3.269"	17.269"	8.625"	10 GA.	17"	8"	3"	1
10"	3"x27"x17"	CP-SPA27	78.854	3.269"	27.269"	10.75"	10 GA.	27"	10"	3"	2
10"	4"x22"x17"	CP-SPA22	78.854	4.269"	22.269"	10.75"	10 GA.	22"	10"	4"	1
12"	4"x28"x18"	CP-SPA28	111.931	4.269"	28.269"	12.75"	10 GA.	28"	11"	4"	2

MATERIAL: 10 GAUGE GALVANIZED A653 G90, MEETS ASTM A-653. TENSILE STRENGTH 50,000. YIELD 36,000. ALL WELDS WILL BE SPRAYED, ROLLED OR BRUSHED WITH GALVANIZED #95 COATING. RECTANGULAR CONNECTION: MASTIC (MUST MEET OR EXCEED ASTM D-4586), CAULKING, EPOXY OR OTHER CITY OF LOS ANGELES APPROVED METHOD. ROUND CONNECTION: CAST IRON/ PLASTIC PIPE CONNECTION USE CAST IRON OR PLASTIC TO STEEL COUPLINGS. CONTACT BUREAU OF CONTRACT ADMINISTRATION MATERIAL CONTROL SECTION AT (213) 485-5080 FOR FABRICATION INSPECTION

